



Firma: Link računari doo
Adresa: Kneza Lazara 35
Telefon: +381 35-245-245
Fax: +381 65-245-245-8
PIB: 106628389
E-mail: office@linkplus.rs

MB s1200 ASUS PRIME H510M-E

Šifra: 120545

Kategorija proizvoda: Matične ploče


Proizvođač: ASUS

MpCena: 9.620,00 rsd.

cena za odloženo plaćanje i kupovinu na rate

Web Cena: 8.016,00 rsd.

cena za web porudžbine i avansno plaćanje

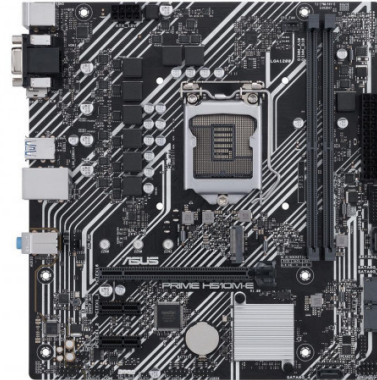

Model	
Brand	ASUS
Model	PRIME H510M-E
Supported CPU	
CPU Socket Type	LGA 1200
CPU Type	Supports 11th / 10th Gen Intel Core Processors* Supports Intel Pentium Gold and Celeron Processors* * Refer to www.asus.com for CPU support list.
Supported CPU Technologies	Supports Intel Turbo Boost Technology 2.0 and Intel Turbo Boost Max Technology 3.0* * Intel Turbo Boost Max Technology 3.0 support depends on the CPU types.
Chipsets	
Chipset	Intel H510
Onboard Video	
Onboard Video Chipset	Supported only by CPU with integrated graphic
Memory	
Number of Memory Slots	2×288pin
Memory Standard	DDR4 3200(OC) / 2933 / 2800 / 2666 / 2400 / 2133* * 11th Gen Intel processors support 2933 / 2800 / 2666 / 2400 / 2133 natively. * 10th Gen Intel Core i9 / i7 processors support 2933 / 2800 / 2666 / 2400 / 2133 natively, others will run at the maximum transfer rate of DDR4 2666MHz. * Refer to www.asus.com for the Memory QVL (Qualified Vendors Lists), and memory frequency support depends on the CPU types.
Maximum Memory Supported	64GB
Channel Supported	Dual Channel
Expansion Slots	
PCI Express 4.0 x16	1 x PCI Express 4.0 x16* * Actual support may vary by CPU.
PCI Express x1	2 x PCIe 3.0 x1
Storage Devices	
SATA 6Gb/s	4 x SATA 6Gb/s

M.2	Intel H510 Chipset: M.2 slot (Key M), type 2242/2260/2280 (supports PCIe 3.0 x4 & SATA modes)* * The M.2 slot shares bandwidth with SATA6G_2. When a device in SATA mode is installed on the M.2 slot, SATA6G_2 port cannot be used.
-----	--

Onboard Audio

Audio Chipset	Realtek ALC897/887
Audio Channels	7.1 Channels* * A chassis with an HD audio module in the front panel is required to support 7.1 Surround Sound audio output.

Onboard LAN

LAN Chipset	Intel I219-V
Max LAN Speed	10/100/1000Mbps

Rear Panel Ports

Back I/O Ports	2 x USB 3.2 Gen 1 ports (2 x Type-A) 2 x USB 2.0 ports (2 x Type-A) 1 x DisplayPort 1 x D-Sub port 1 x HDMI port 1 x Intel I219-V 1Gb Ethernet port 3 x Audio jacks 1 x PS/2 Keyboard (purple) port 1 x PS/2 Mouse (green) port
----------------	---

Internal I/O Connectors

Onboard USB	1 x USB 3.2 Gen 1 header supports additional 2 USB 3.2 Gen 1 ports 2 x USB 2.0 headers support additional 4 USB 2.0 ports
Other Connectors	Fan and Cooling related 1 x 4-pin CPU Fan header 1 x 4-pin Chassis Fan header Miscellaneous 1 x RGB header 1 x Clear CMOS header 1 x COM Port header 1 x Front Panel Audio header (AAFP) 1 x S/PDIF Out header 1 x Speaker header 1 x SPI TPM header (14-1pin) 1 x 10-1 pin System Panel header

Physical Spec

Form Factor	Micro ATX
LED Lighting	RGB
Dimensions (W x L)	8.9" x 8.3"
Power Pin	1 x 24-pin Main Power connector 1 x 8-pin +12V Power connector

Windows Compatibility

Windows 11	Supported
------------	-----------

Features

Features	Special Features: ASUS 5X PROTECTION III - DIGI+ VRM - LANGuard - Overvoltage Protection - SafeSlot Core - Stainless-Steel Back I/O ASUS Q-Design - Q-DIMM - Q-Slot ASUS Thermal Solution - Aluminum heatsink design ASUS Lighting Control - RGB header Software Features: ASUS Exclusive Software Armoury Crate AI Suite 3 - Performance And Power Saving Utility TurboV EVO EPU DIGI+ VRM Fan Xpert - EZ update ASUS CPU-Z AI Charger DAEMON Tools Norton Anti-virus software (Free Trial version) WinRAR UEFI BIOS ASUS EZ DIY - ASUS CrashFree BIOS 3 - ASUS EZ Flash 3 - ASUS UEFI BIOS EZ Mode BIOS: 128 MB Flash ROM, UEFI AMI BIOS Manageability: WOL by PME, PXE Operating System: Windows 10 64-bit
-----------------	--

	Packaging
Package Contents	Accessories: Cables 2 x SATA 6Gb/s cables Miscellaneous 1 x I/O Shield 1 x M.2 SSD screw package Installation Media 1 x Support DVD Documentation 1 x User manual

Uvek smo ovde i tako već 20 godina!